

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/019588 A1

(51) International Patent Classification⁷: **H04L 29/06**

(74) Agent: RÖGGLA, Harald; Philips Intellectual Property
& Standards, Triester Strasse 64, A-1101 Vienna (AT).

(21) International Application Number:
PCT/IB2003/003443

(22) International Filing Date: 5 August 2003 (05.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02102219.9 26 August 2002 (26.08.2002) EP

(71) Applicant (for all designated States except US): KONIN-
KLJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PROIDL, Adolf
[AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).

[Continued on next page]

(54) Title: INTERNET DEVICE PROVIDING QUALITY AND LINK INFORMATION

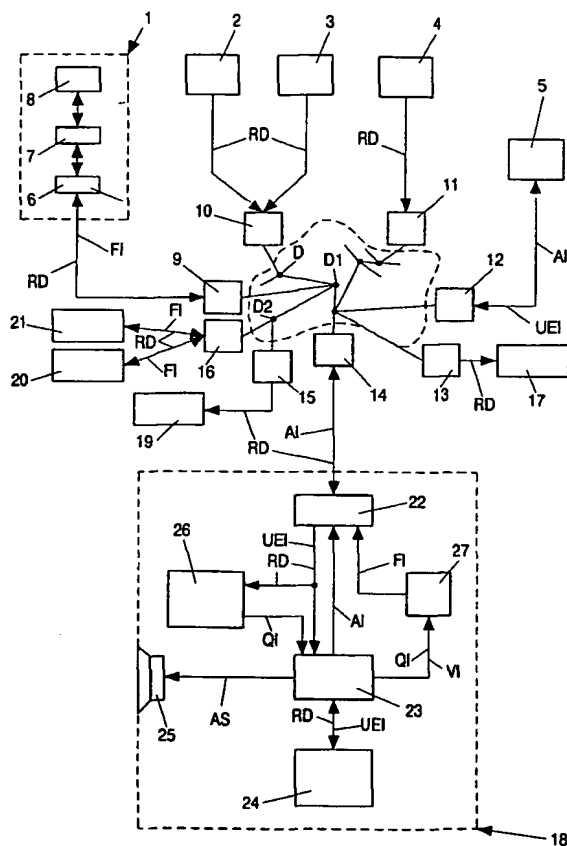

(57) Abstract: A receiver (17, 18, 19, 20, 21) for receiving in-
formation data outputs feedback information (FI) to a device (1,
2, 3, 4, 5) provided for monitoring the retrievability of the infor-
mation data (RD), which device (1, 2, 3, 4, 5) outputs fault report
information to the devices (D2, 16) in the transmission path of
the information data (RD) which are responsible for poor quality
reception of information data (RD).